

FIGURE 1
WEAR MEMBER WITH PIN-RETAINER
RECEIVING HOLE
FOR 30° SEE 28850



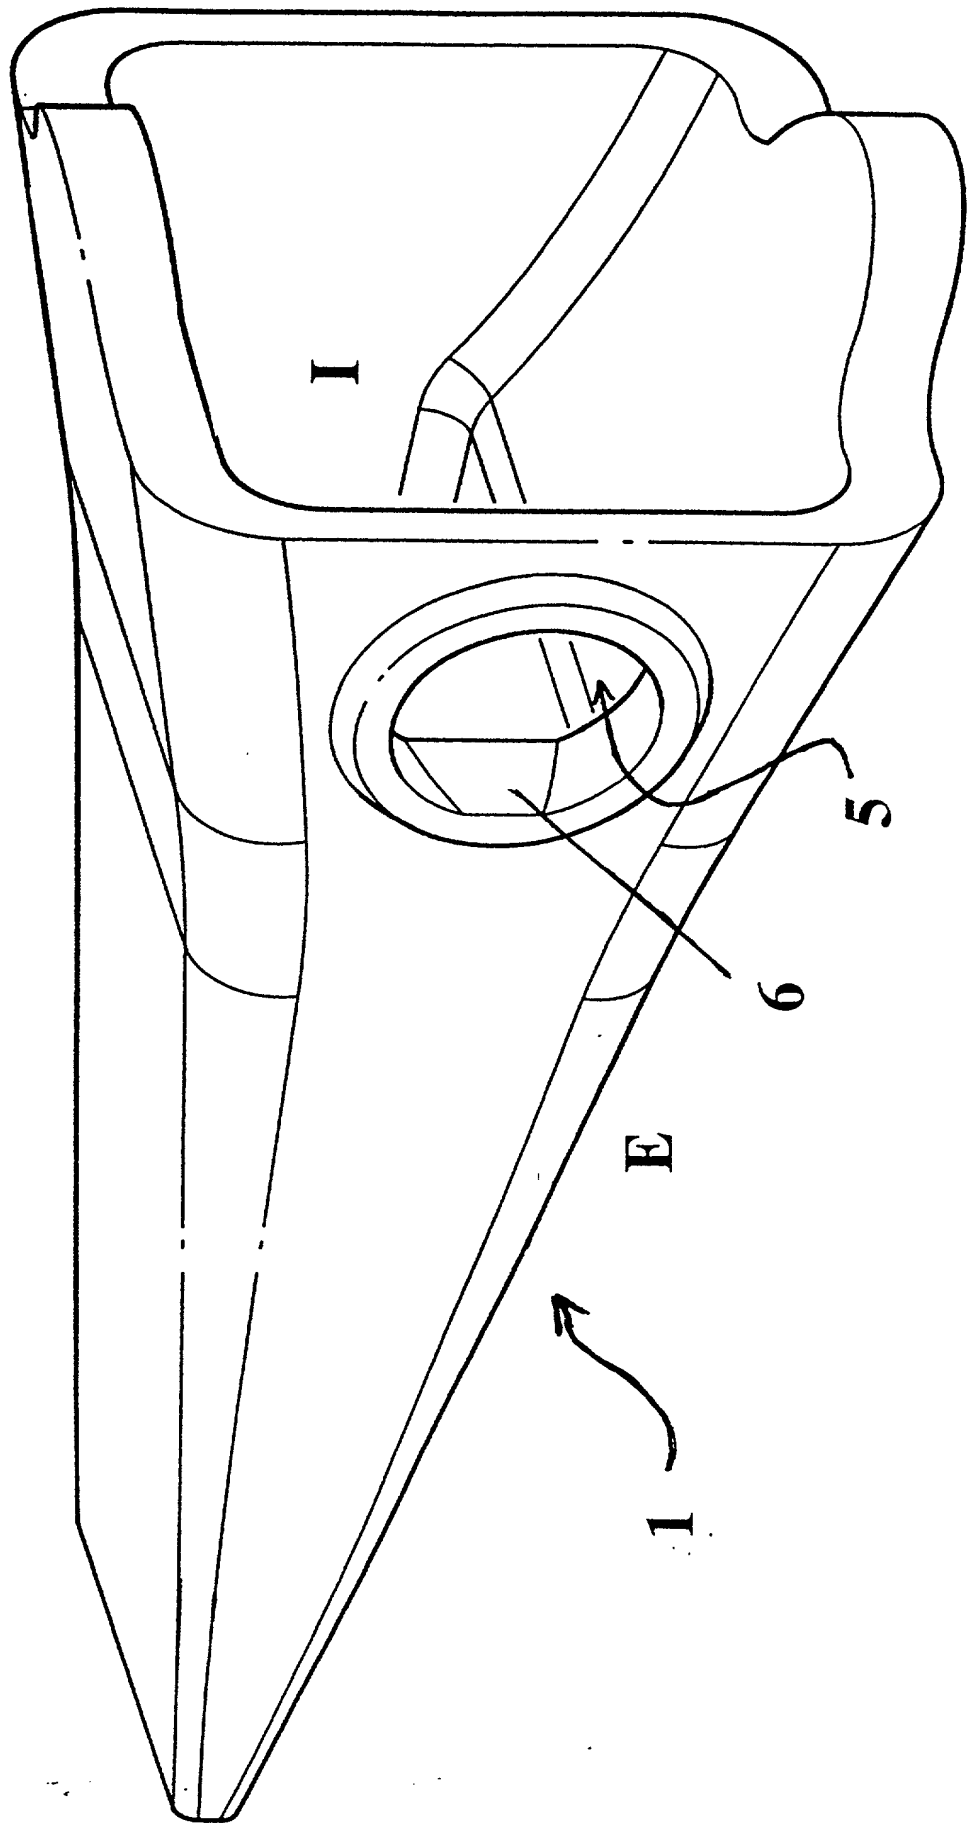


FIGURE 2
PIN RETAINER WITH INTERNAL
THREADS

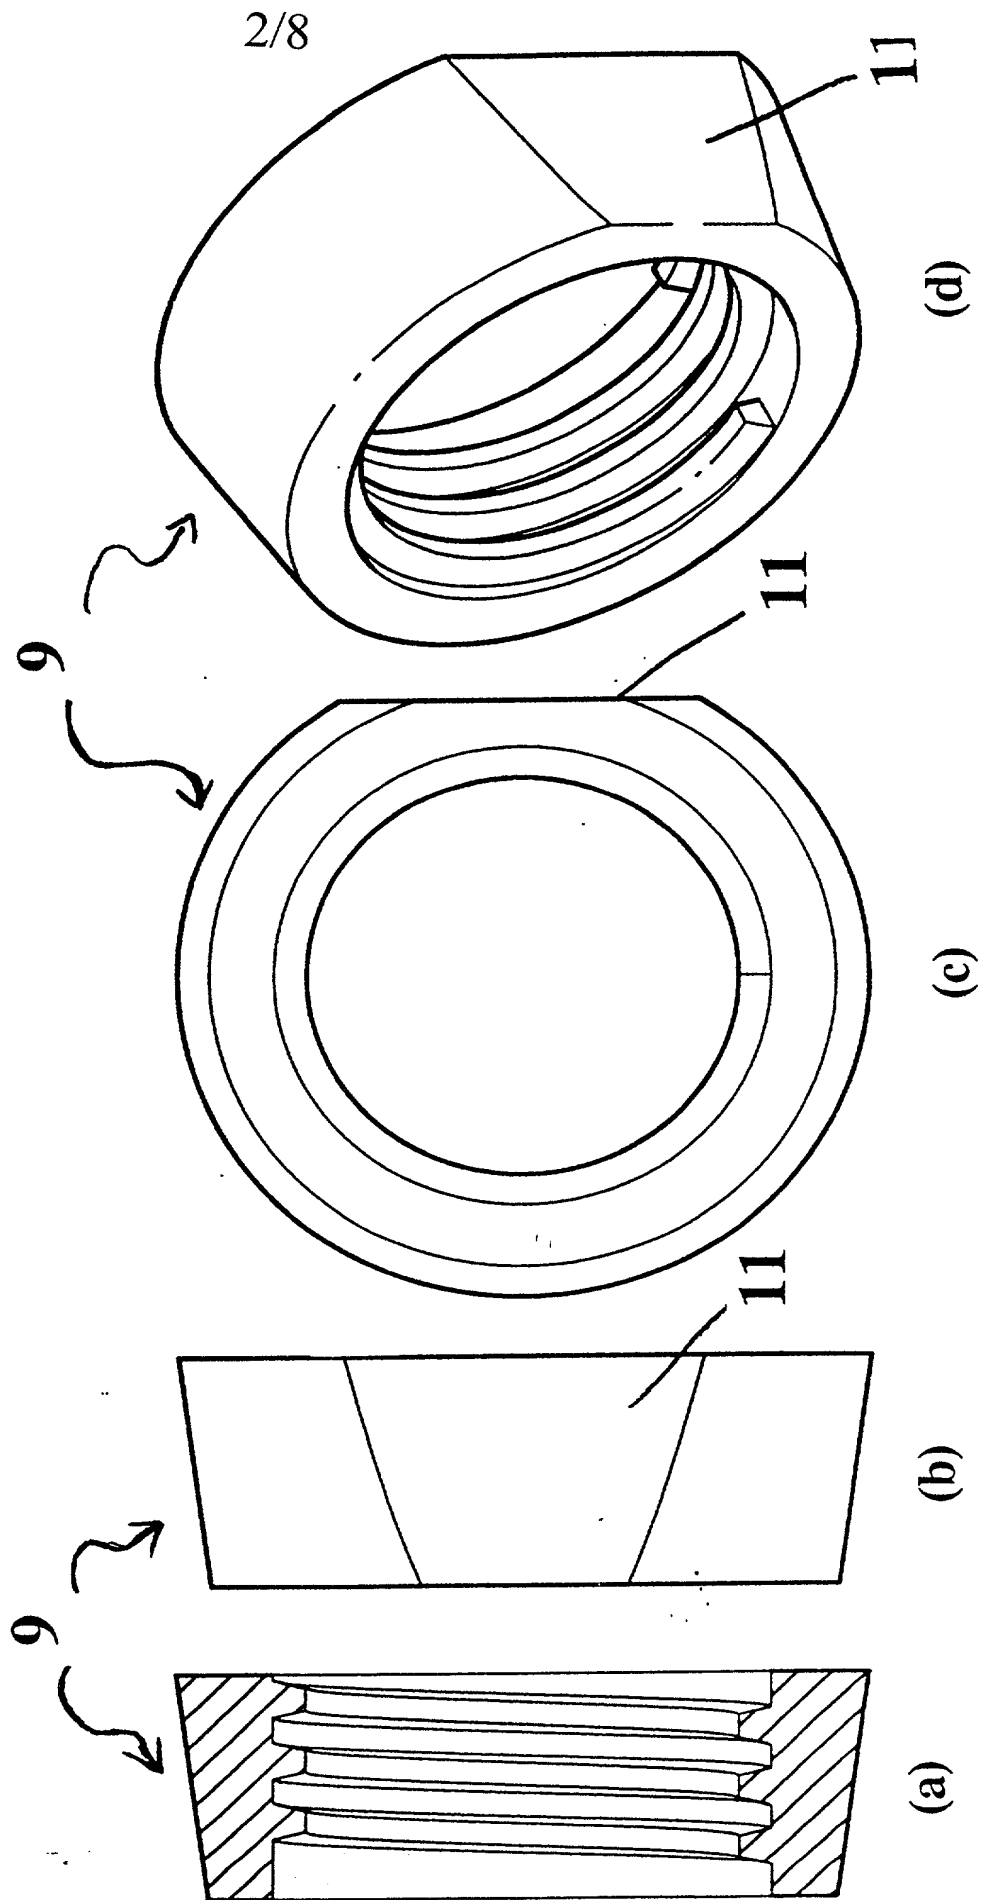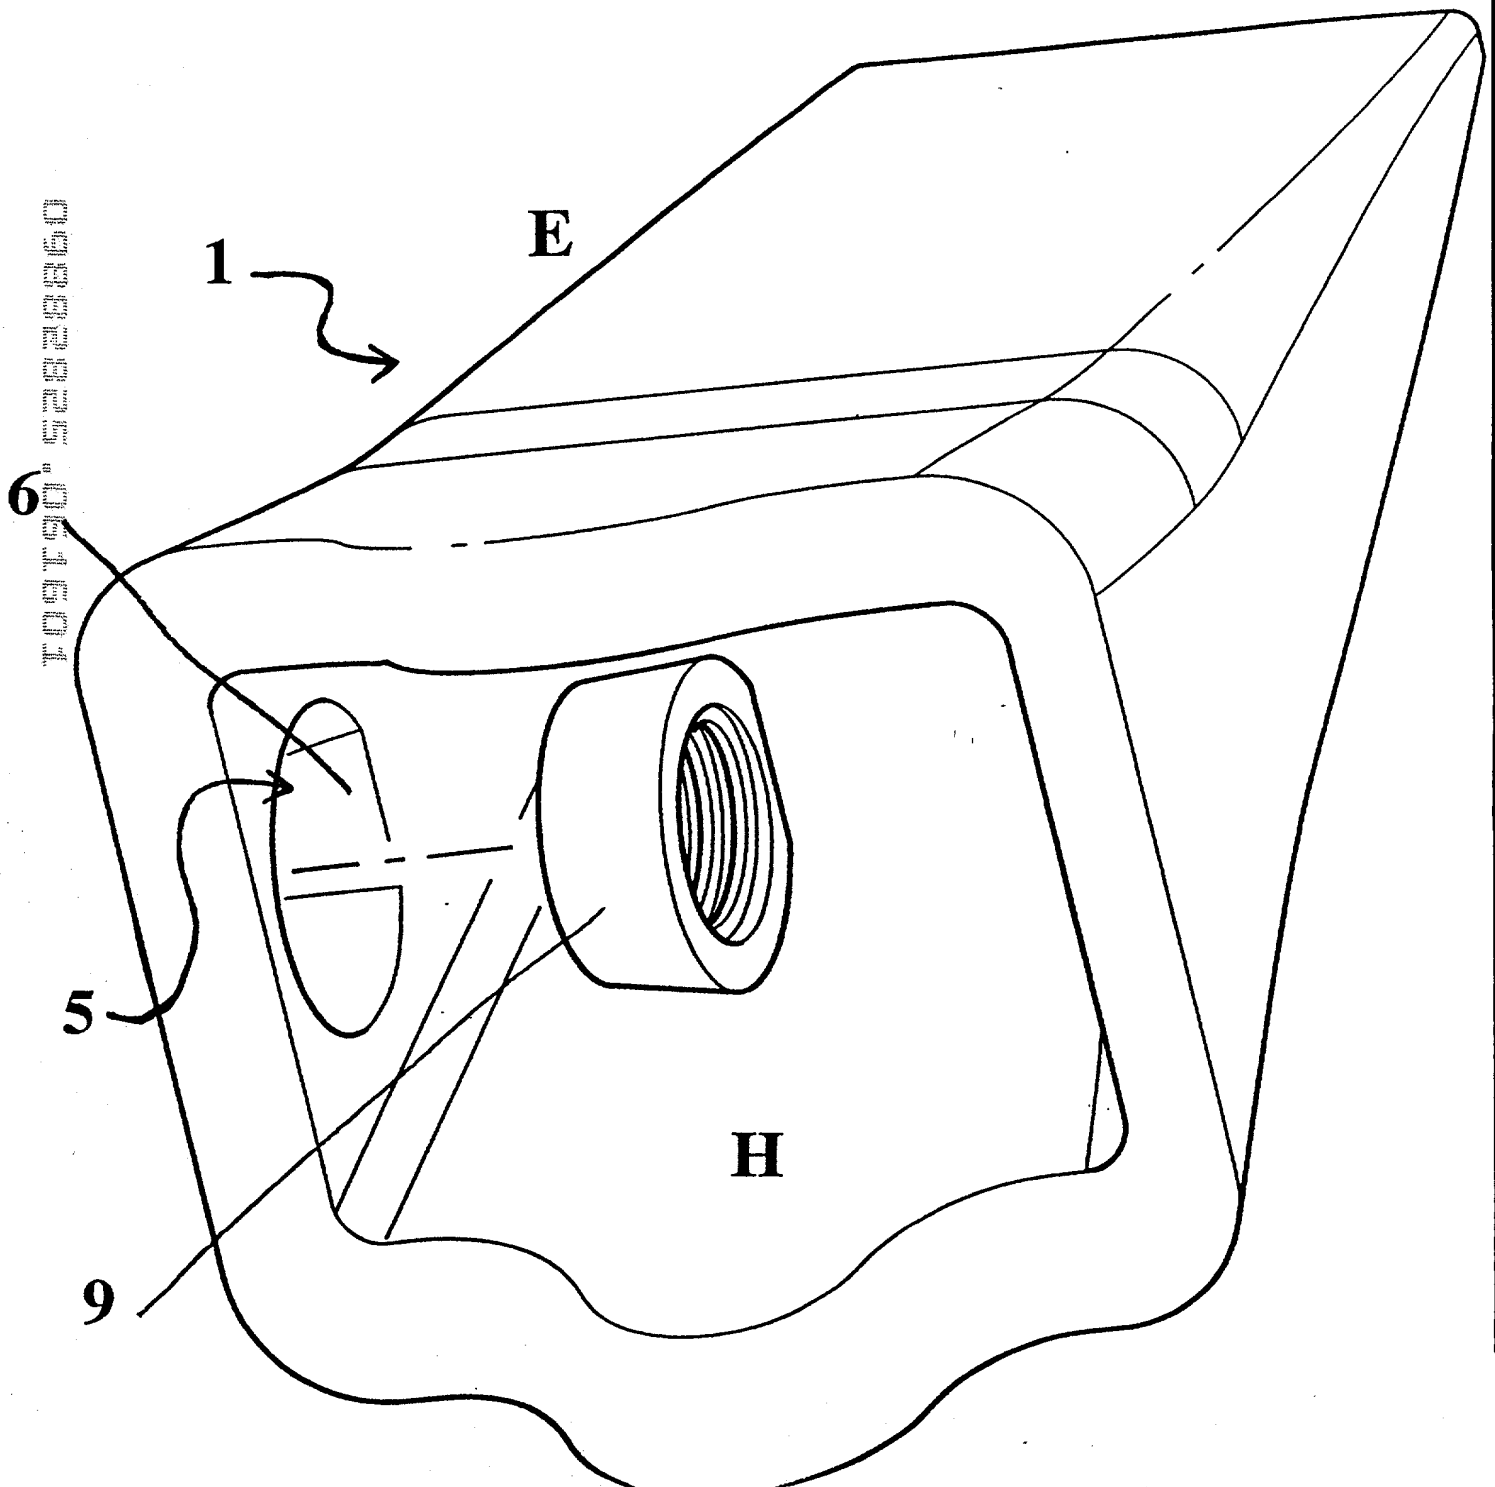

SECTION A-A

FIGURE 3 **PIN RETAINER READY FOR
INSTALLATION IN WEAR MEMBER**



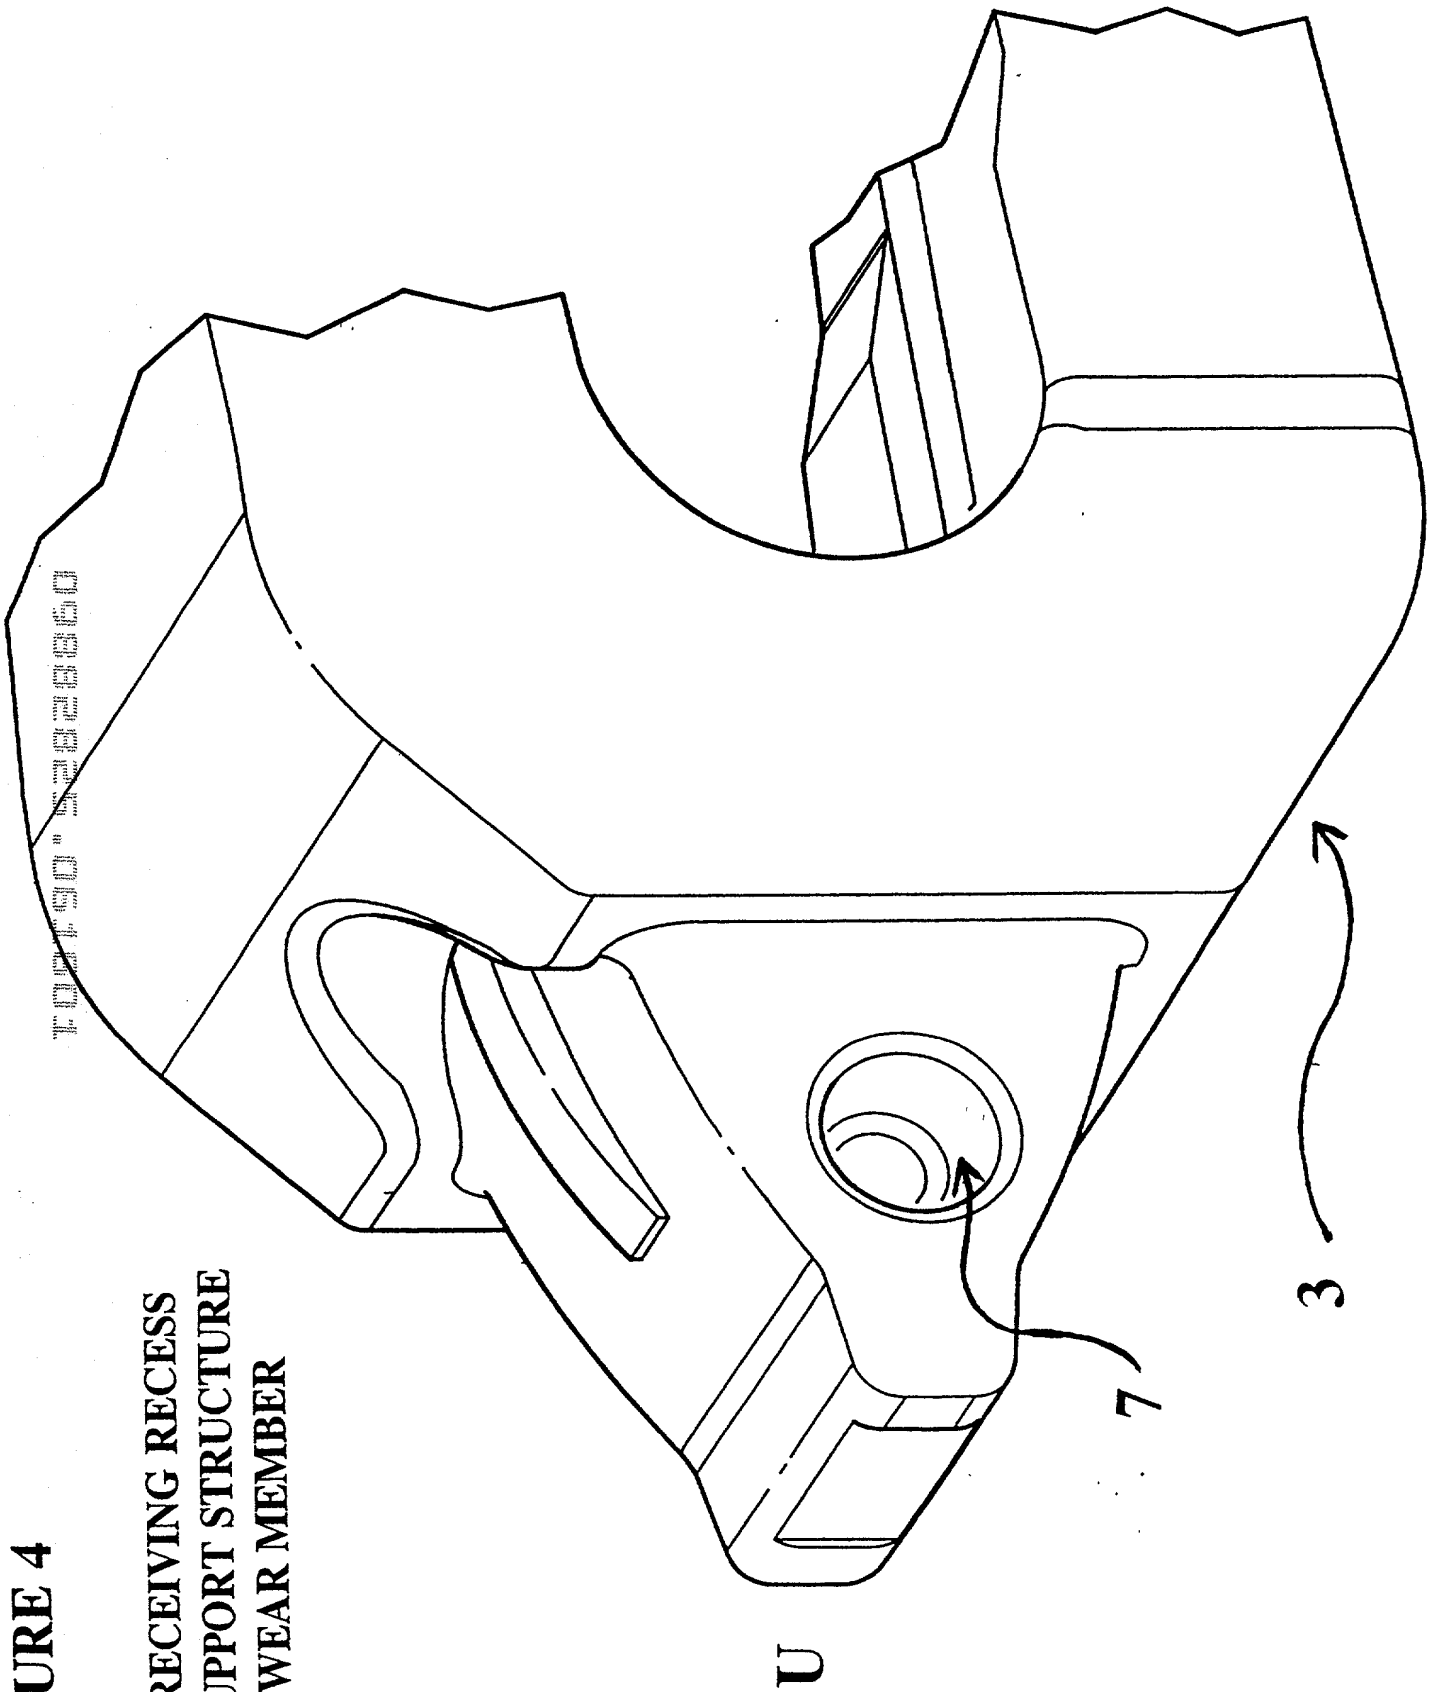


FIGURE 5 **TURNABLE THREADED LOCK PIN WITH EXTERNAL**
THREADS AND RECESS FOR HEXAGONAL TURNING TOOL

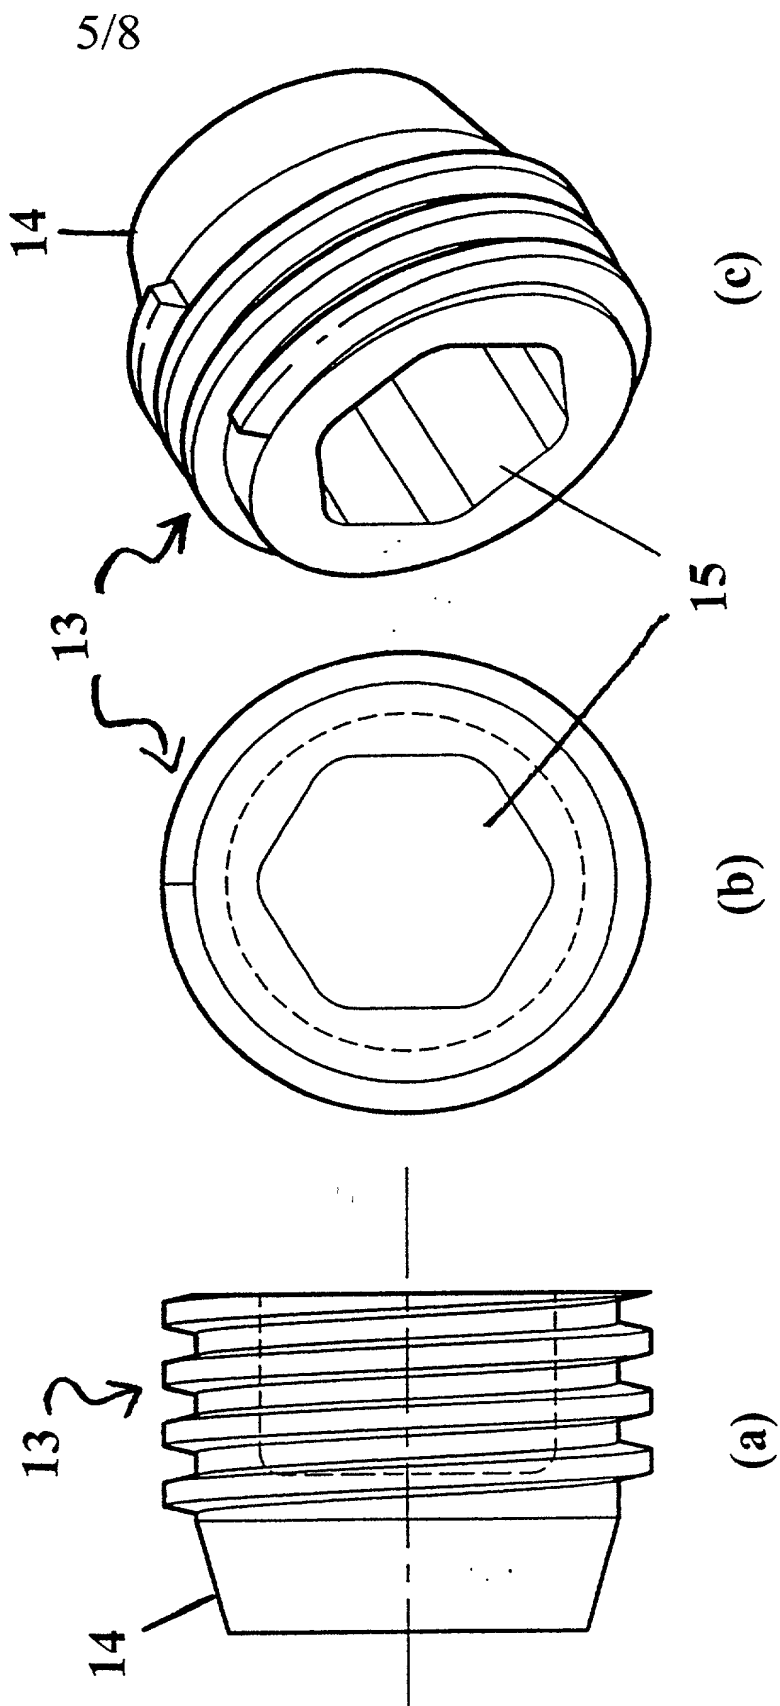


FIGURE 6

**LOCK PIN READY FOR INSTALLATION IN WEAR
MEMBER MOUNTED ON SUPPORT STRUCTURE**

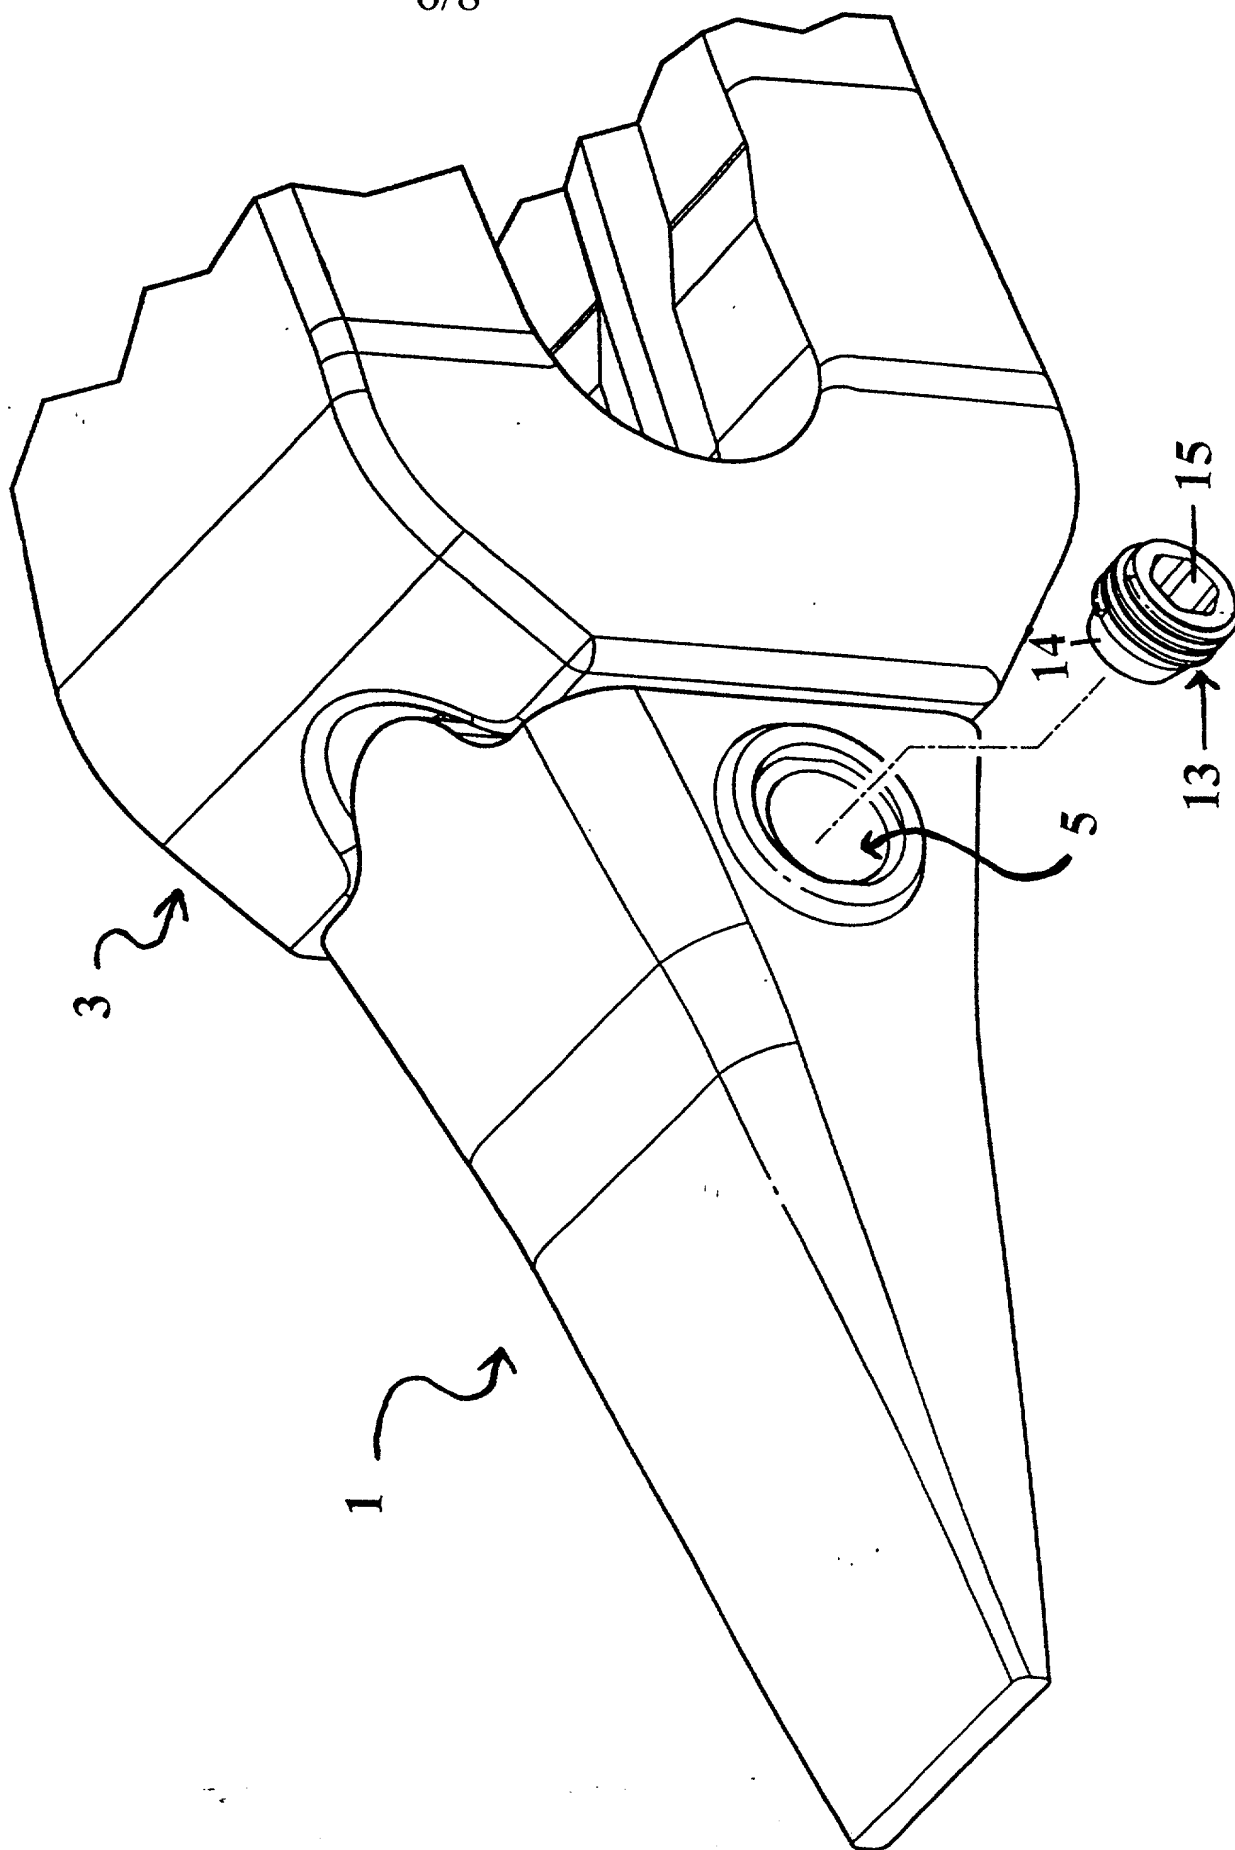


FIGURE 7 WEAR MEMBER MOUNTED AND LOCKED TO
SUPPORT STRUCTURE, READY FOR USE

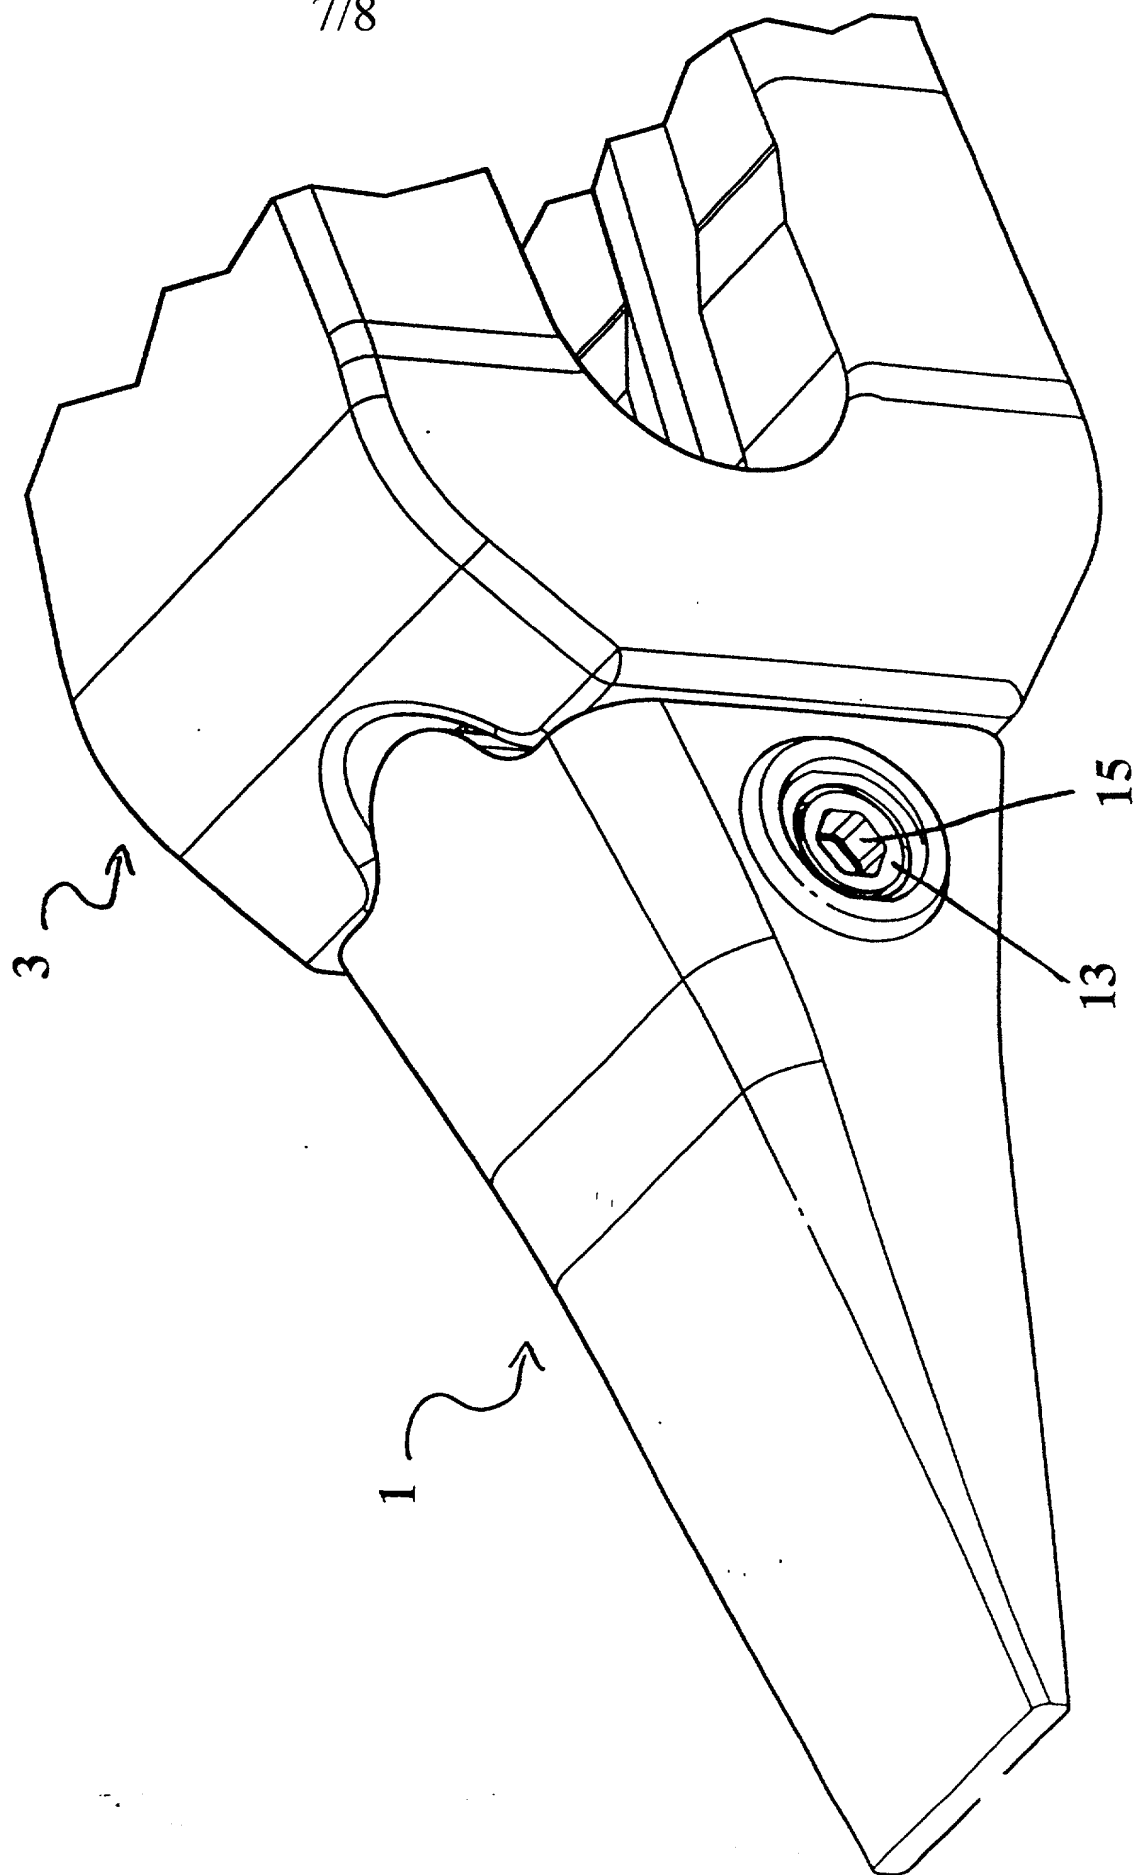


FIGURE 9

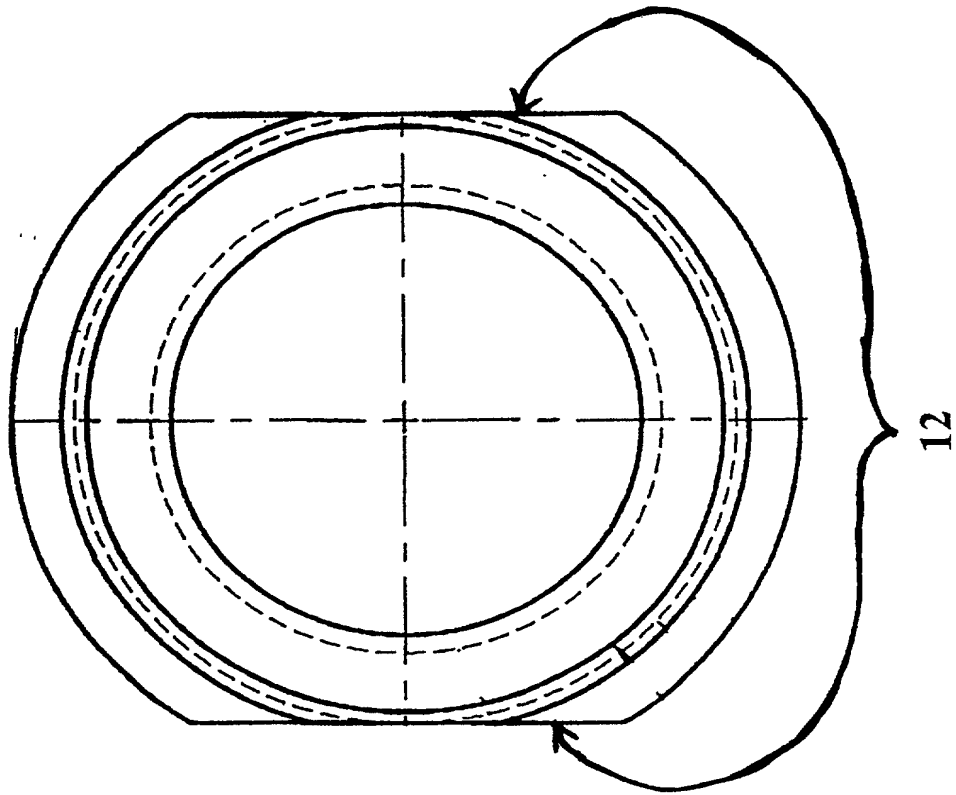


FIGURE 8

